



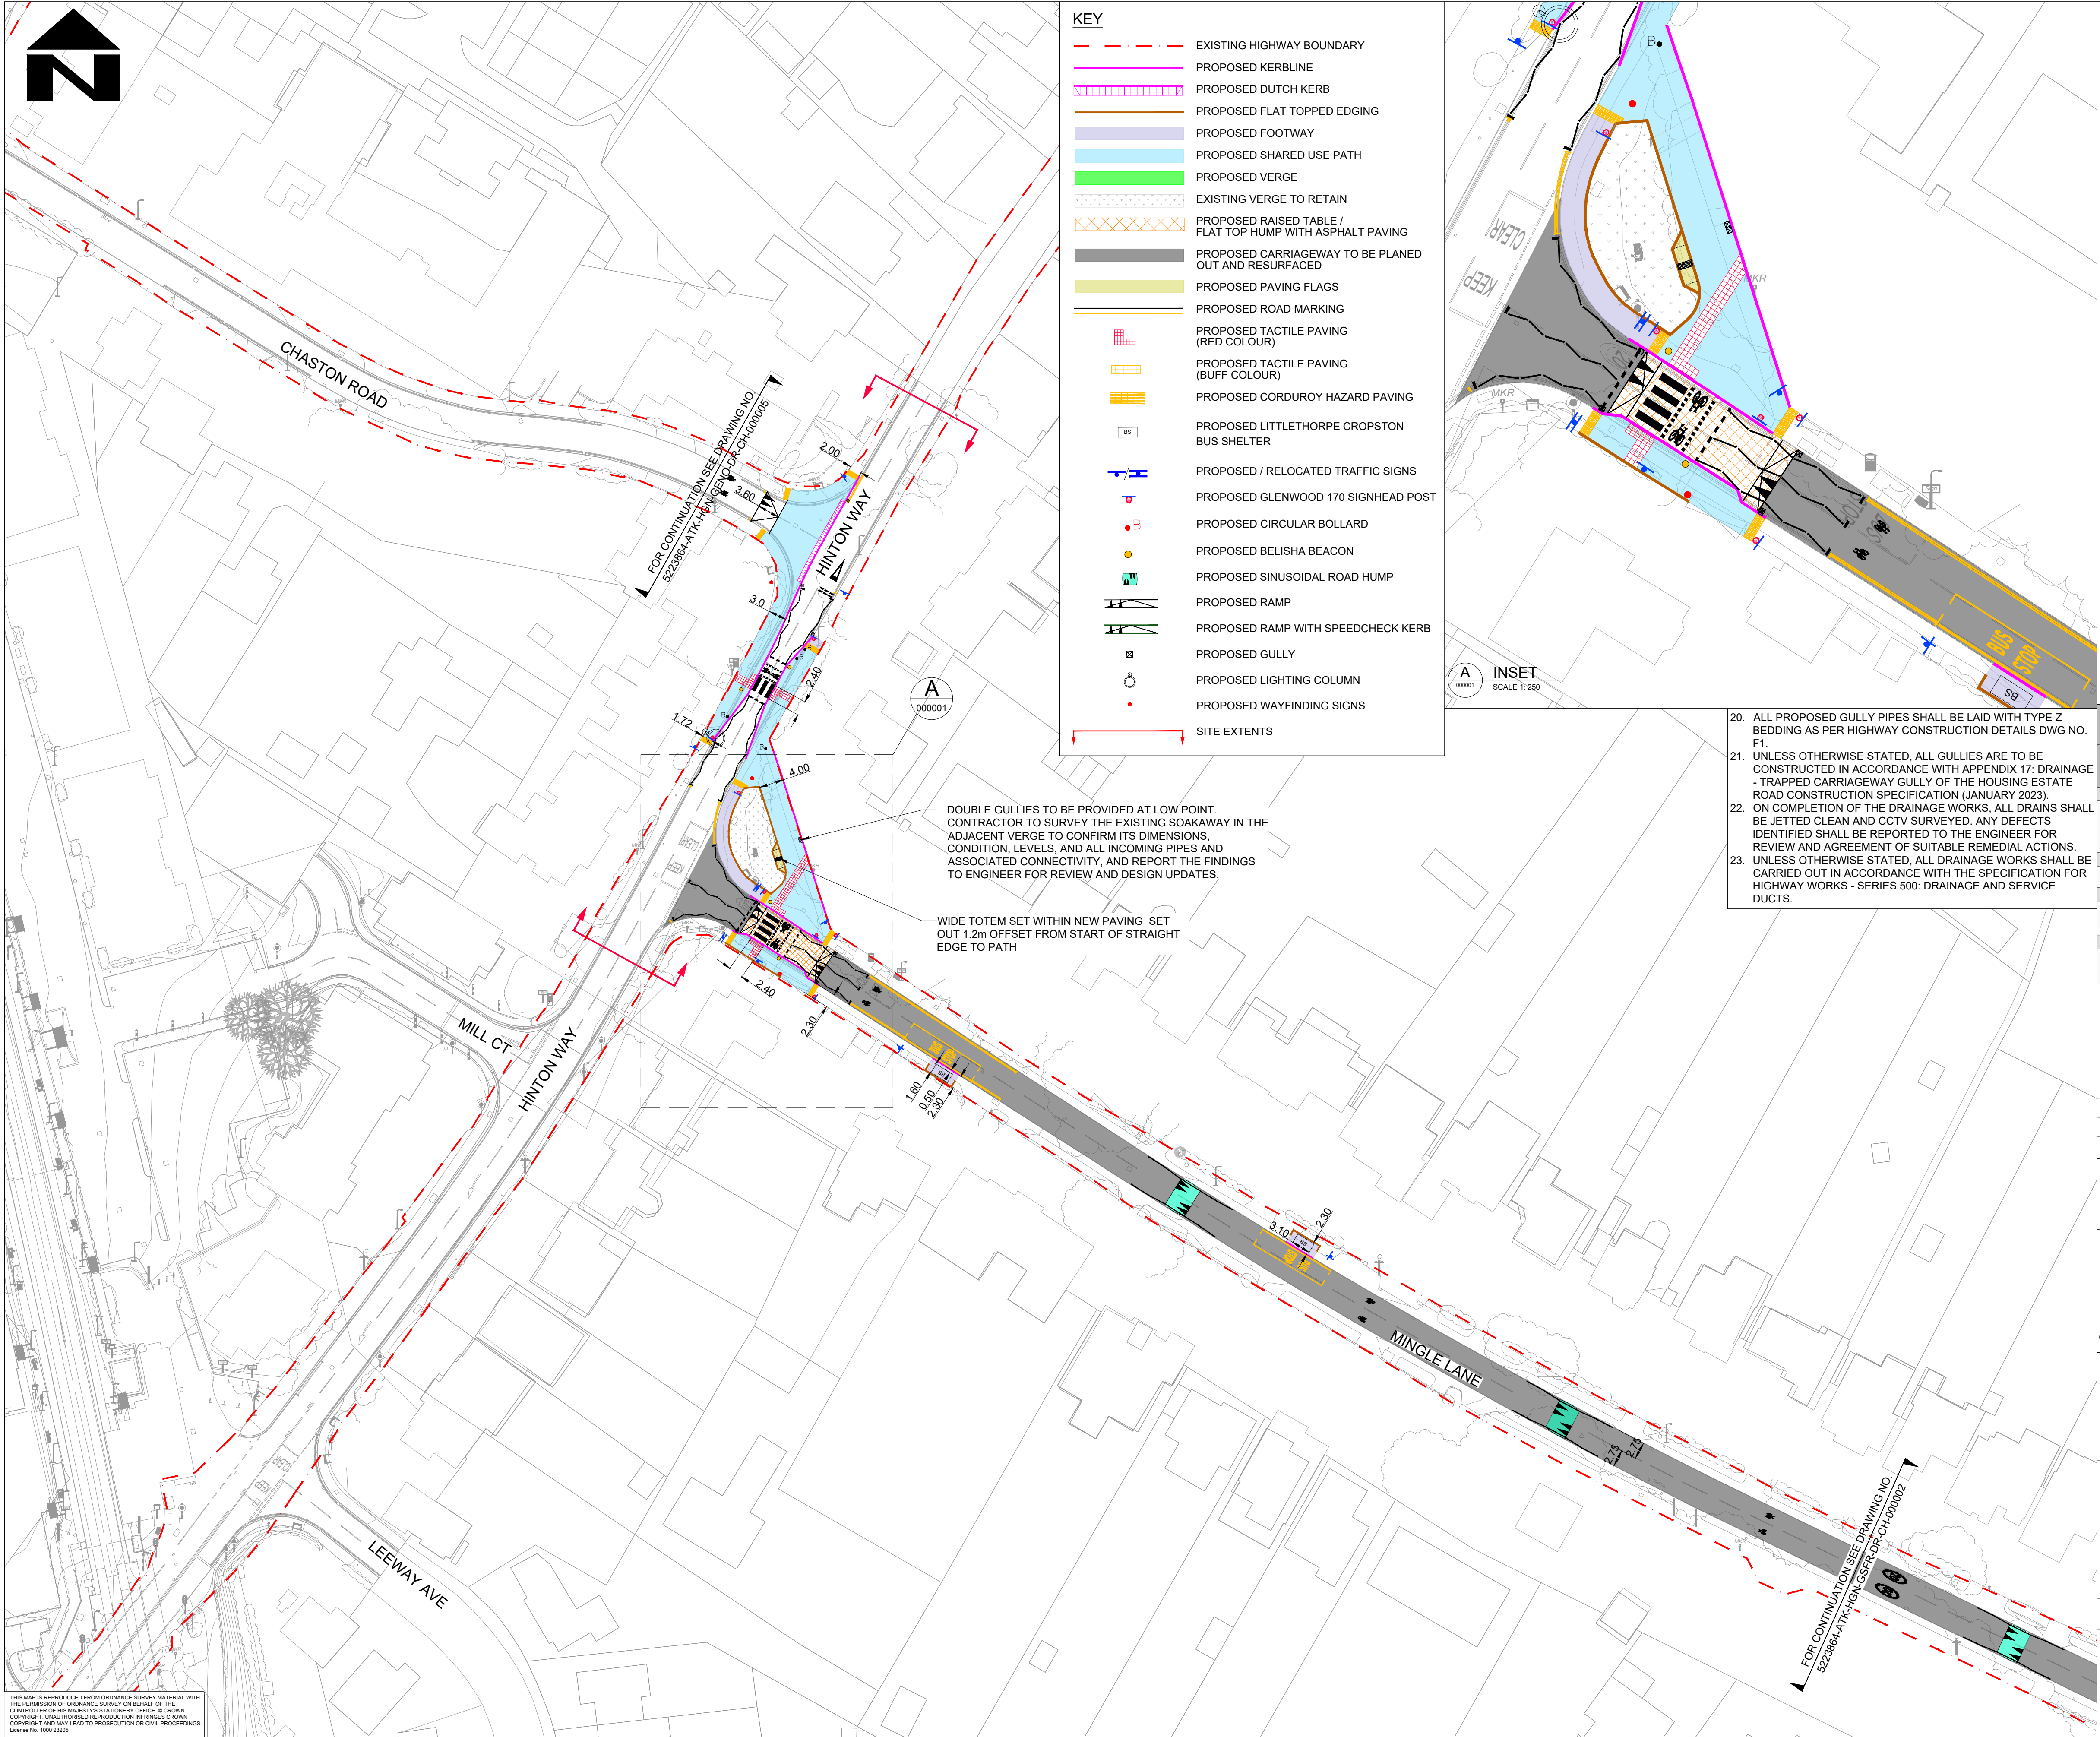

- KEY**
- EXISTING HIGHWAY BOUNDARY
 - PROPOSED KERBLINE
 - PROPOSED DUTCH KERB
 - PROPOSED FLAT TOPPED EDGING
 - PROPOSED FOOTWAY
 - PROPOSED SHARED USE PATH
 - PROPOSED VERGE
 - EXISTING VERGE TO RETAIN
 - PROPOSED RAISED TABLE / FLAT TOP HUMP WITH ASPHALT PAVING
 - PROPOSED CARRIAGEWAY TO BE PLANED OUT AND RESURFACED
 - PROPOSED PAVING FLAGS
 - PROPOSED ROAD MARKING
 - PROPOSED TACTILE PAVING (RED COLOUR)
 - PROPOSED TACTILE PAVING (BUFF COLOUR)
 - PROPOSED CORDUROY HAZARD PAVING
 - PROPOSED LITTLETHORPE CROPSTON BUS SHELTER
 - PROPOSED / RELOCATED TRAFFIC SIGNS
 - PROPOSED GLENWOOD 170 SIGNHEAD POST
 - PROPOSED CIRCULAR BOLLARD
 - PROPOSED BELISHA BEACON
 - PROPOSED SINUSOIDAL ROAD HUMP
 - PROPOSED RAMP
 - PROPOSED RAMP WITH SPEEDCHECK KERB
 - PROPOSED GULLY
 - PROPOSED LIGHTING COLUMN
 - PROPOSED WAYFINDING SIGNS
 - SITE EXTENTS

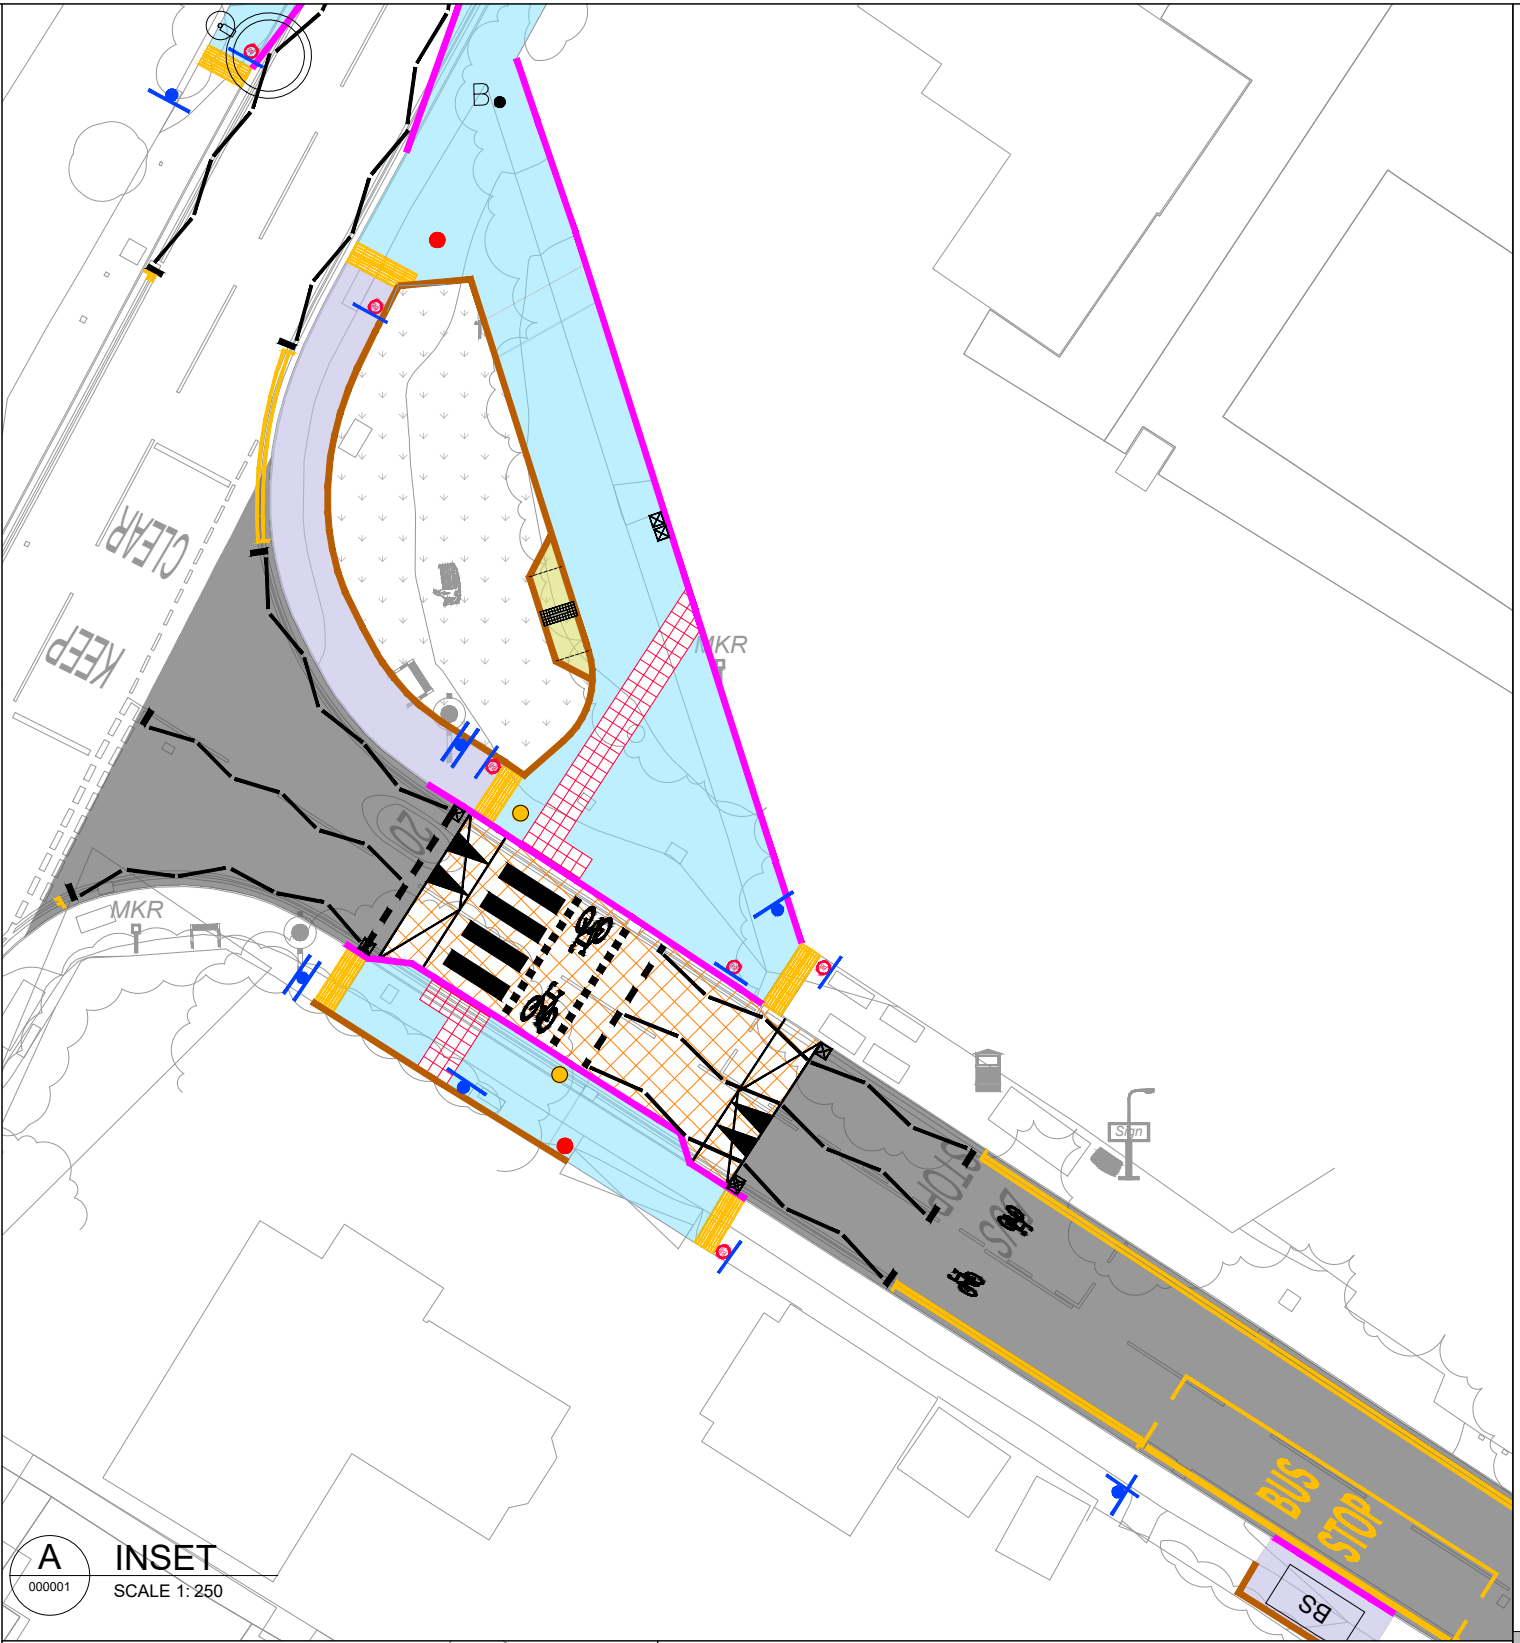

20. ALL PROPOSED GULLY PIPES SHALL BE LAID WITH TYPE Z BEDDING AS PER HIGHWAY CONSTRUCTION DETAILS DWG NO. F1.
21. UNLESS OTHERWISE STATED, ALL GULLIES ARE TO BE CONSTRUCTED IN ACCORDANCE WITH APPENDIX 17: DRAINAGE - TRAPPED CARRIAGEWAY GULLY OF THE HOUSING ESTATE ROAD CONSTRUCTION SPECIFICATION (JANUARY 2023).
22. ON COMPLETION OF THE DRAINAGE WORKS, ALL DRAINS SHALL BE JETTED CLEAN AND CCTV SURVEYED. ANY DEFECTS IDENTIFIED SHALL BE REPORTED TO THE ENGINEER FOR REVIEW AND AGREEMENT OF SUITABLE REMEDIAL ACTIONS.
23. UNLESS OTHERWISE STATED, ALL DRAINAGE WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE SPECIFICATION FOR HIGHWAY WORKS - SERIES 500: DRAINAGE AND SERVICE DUCTS.

DOUBLE GULLIES TO BE PROVIDED AT LOW POINT. CONTRACTOR TO SURVEY THE EXISTING SOAKAWAY IN THE ADJACENT VERGE TO CONFIRM ITS DIMENSIONS, CONDITION, LEVELS, AND ALL INCOMING PIPES AND ASSOCIATED CONNECTIVITY, AND REPORT THE FINDINGS TO ENGINEER FOR REVIEW AND DESIGN UPDATES.

WIDE TOTEM SET WITHIN NEW PAVING SET OUT 1.2m OFFSET FROM START OF STRAIGHT EDGE TO PATH

NOTES

- DO NOT SCALE FROM THIS DRAWING.
- ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE STATED.
- LIMITS OF WORK ARE APPROXIMATE AND ARE TO BE AGREED ON SITE WITH THE OVERSEEING ORGANISATION.
- ANY WORK OUTSIDE THE HIGHWAY BOUNDARY NEEDS PRIOR PERMISSION FROM THE LAND OWNER.
- HEALTH AND SAFETY: THE CONTRACTOR SHALL BE AWARE OF ALL STATUTORY UNDERTAKERS PLANT THAT MAY BE LOCATED WITHIN THE SITE. PLANS SHOWING APPROXIMATE LOCATIONS HAVE BEEN SUPPLIED BY ASSET OWNER.
- FOR SITE CLEARANCE DETAILS, REFER TO DRAWING NO.5223864-ATK-HSC-GSFR-DR-CH-000001 TO 000005.
- FOR KERBS, FOOTWAYS AND PAVEMENT DETAILS, REFER DRAWING NO. 5223864-ATK-HPV-GSFR-DR-CH-000001 TO 000004 AND 000007.
- FOR STANDARD DETAILS, REFER DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000002, 000003 AND 000007.
- FOR TRAFFIC SIGNS DETAILS, REFER DRAWING NO. 5223864-ATK-HSN-GSFR-DR-CH-000001 TO 000004 AND 000006.
- FOR ROAD MARKINGS DETAILS, REFER DRAWING NO. 5223864-ATK-HMK-GSFR-DR-CH-000001 TO 000005.
- FOR LIGHTING DETAILS, REFER DRAWING NO. 5223864-ATK-HLG-GSFR-DR-EO-000001 TO 000004 AND 000006.
- FOR GLENWOOD 170 SIGNHEAD POST & EATON BUS SHELTER DETAILS REFER TO DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000007.
- THE HIGHWAY BOUNDARY SHOWN HAS BEEN UPDATED IN ACCORDANCE WITH CCC SEARCHES TEAM'S EMAIL CONFIRMATION OF REQUIRED CORRECTIONS DATED 22/08/25.
- THE DRAINAGE DESIGN IS BASED ON THE INFORMATION AVAILABLE TO THE DESIGNER AT THE TIME OF DESIGN. EXISTING DRAINAGE LOCATIONS, CONDITIONS, AND CAPACITIES ARE NOT AVAILABLE AND ARE UNVERIFIED. NO DOWNS/STREAM CONNECTIONS HAVE BEEN DESIGNED. THE DRAINAGE DESIGN MUST BE UPDATED FOLLOWING SUCCESSFUL COMPLETION OF THE DRAINAGE SURVEY AND BEFORE CONSTRUCTION COMMENCES.
- FOR DRAINAGE DETAILS, REFER TO DRAWING NO. 5223864-ATK-HDG-XX-DR-CD-000001.
- IT IS ASSUMED THAT SUITABLE CONNECTION POINTS ARE AVAILABLE FOR THE PROPOSED DRAINAGE ASSETS.
- PROPOSED GULLIES HAVE BEEN POSITIONED TO REPLICATE THE EXISTING DRAINAGE CONFIGURATION AS FAR AS PRACTICABLE.
- ANY ADJUSTMENT OR REPLACEMENT OF EXISTING FRAMES AND GRATINGS SHALL BE UNDERTAKEN IN ACCORDANCE WITH S.H.W. CLAUSE 508.10.
- ALL GULLY GRATES SHALL BE HIGHWAY D400, HEEL-SAFE, AND PEDESTRIAN-FRIENDLY GULLY GRATE WITH 425 MM X 425 MM CLEAR OPENING.

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following significant residual risks (Reference shall also be made to the design hazard log).

Construction
Live traffic & utilities, Presence of tar.
Presence of soil contamination, asbestos and breaking of concrete not known.

Maintenance / Cleaning
None

Use
None

Decommissioning / Demolition
None

P05	RG	PM	AC	18/09/24
Client Comments Incorporated				
P06	RG	PM	AC	20/09/24
Client Comments Incorporated				
P07	RG	PM	AC	25/02/25
RSA 2 and Stakeholder Updates				
C01	AS	PM	AC	28/11/25

Issue for Tender

Rev	Drawn / Des	Checked	Approved	Date
Description				

Drawing Status	Suitability
APPROVED - PUBLISHED	A1

5 Wellbrook Court,
Cambridge
CB3 0NA

Tel: +44 (0) 122376002

Copyright © AtkinsRéalis (2025) www.atkinsrealis.com

Client

Greater Cambridge Partnership
Growing and sharing prosperity
Delivering our City Deal

Project Title
GCP Early Works - Detailed Design

Drawing Title
GENERAL ARRANGEMENT
STAPLEFORD VILLAGE (ON ROAD)
(SCHEME 5) (SHEET 1 OF 5)

Scale 1:500	Designed / Drawn AS	Checked PM	Approved AC	Authorised AW
Original Size A1	Date 28/11/25	Date 28/11/25	Date 28/11/25	Date 28/11/25

Drawing Number Project 5223864	Originator ATK	Volume HGN	Job No. 5223864
Location GSFR	Type DR	Role CH	Revision C01



KEY	
	EXISTING HIGHWAY BOUNDARY
	PROPOSED KERBLINE
	PROPOSED DUTCH KERB
	PROPOSED FLAT TOPPED EDGING
	PROPOSED FOOTWAY
	PROPOSED SHARED USE PATH
	PROPOSED VERGE
	EXISTING VERGE TO RETAIN
	PROPOSED RAISED TABLE / FLAT TOP HUMP WITH ASPHALT PAVING
	PROPOSED CARRIAGEWAY TO BE PLANNED OUT AND RESURFACED
	PROPOSED PAVING FLAGS
	PROPOSED ROAD MARKING
	PROPOSED TACTILE PAVING (RED COLOUR)
	PROPOSED TACTILE PAVING (BUFF COLOUR)
	PROPOSED CORDUROY HAZARD PAVING
	PROPOSED LITTLETHORPE CROPSTON BUS SHELTER
	PROPOSED / RELOCATED TRAFFIC SIGNS
	PROPOSED GLENWOOD 170 SIGNHEAD POST
	PROPOSED CIRCULAR BOLLARD
	PROPOSED BELISHA BEACON
	PROPOSED SINUSOIDAL ROAD HUMP
	PROPOSED RAMP
	PROPOSED RAMP WITH SPEEDCHECK KERB
	PROPOSED GULLY
	PROPOSED LIGHTING COLUMN
	PROPOSED WAYFINDING SIGNS
	SITE EXTENTS

20. ALL PROPOSED GULLY PIPES SHALL BE LAID WITH TYPE Z BEDDING AS PER HIGHWAY CONSTRUCTION DETAILS DWG NO. F1.
21. UNLESS OTHERWISE STATED, ALL GULLIES ARE TO BE CONSTRUCTED IN ACCORDANCE WITH APPENDIX 17: DRAINAGE - TRAPPED CARRIAGEWAY GULLY OF THE HOUSING ESTATE ROAD CONSTRUCTION SPECIFICATION (JANUARY 2023).
22. ON COMPLETION OF THE DRAINAGE WORKS, ALL DRAINS SHALL BE JETTED CLEAN AND CCTV SURVEYED. ANY DEFECTS IDENTIFIED SHALL BE REPORTED TO THE ENGINEER FOR REVIEW AND AGREEMENT OF SUITABLE REMEDIAL ACTIONS.
23. UNLESS OTHERWISE STATED, ALL DRAINAGE WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE SPECIFICATION FOR HIGHWAY WORKS - SERIES 500: DRAINAGE AND SERVICE DUCTS.

- NOTES
- DO NOT SCALE FROM THIS DRAWING.
 - ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE STATED.
 - LIMITS OF WORK ARE APPROXIMATE AND ARE TO BE AGREED ON SITE WITH THE OVERSEEING ORGANISATION.
 - ANY WORK OUTSIDE THE HIGHWAY BOUNDARY NEEDS PRIOR PERMISSION FROM THE LAND OWNER.
 - HEALTH AND SAFETY:
THE CONTRACTOR SHALL BE AWARE OF ALL STATUTORY UNDERTAKERS PLANT THAT MAY BE LOCATED WITHIN THE SITE. PLANS SHOWING APPROXIMATE LOCATIONS HAVE BEEN SUPPLIED BY ASSET OWNER.
 - FOR SITE CLEARANCE DETAILS, REFER TO DRAWING NO. 5223864-ATK-HSC-GSFR-DR-CH-000001 TO 000005.
 - FOR KERBS, FOOTWAYS AND PAVEMENT DETAILS, REFER DRAWING NO. 5223864-ATK-HPV-GSFR-DR-CH-000001 TO 000004 AND 000007.
 - FOR STANDARD DETAILS, REFER DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000002, 000003 AND 000007.
 - FOR TRAFFIC SIGNS DETAILS, REFER DRAWING NO. 5223864-ATK-HSN-GSFR-DR-CH-000001 TO 000004 AND 000006.
 - FOR ROAD MARKINGS DETAILS, REFER DRAWING NO. 5223864-ATK-HMK-GSFR-DR-CH-000001 TO 000005.
 - FOR LIGHTING DETAILS, REFER DRAWING NO. 5223864-ATK-HLG-GSFR-DR-EO-000001 TO 000004 AND 000006.
 - FOR GLENWOOD 170 SIGNHEAD POST & EATON BUS SHELTER DETAILS REFER TO DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000007.
 - THE HIGHWAY BOUNDARY SHOWN HAS BEEN UPDATED IN ACCORDANCE WITH CCC SEARCHES TEAM'S EMAIL CONFIRMATION OF REQUIRED CORRECTIONS DATED 22/08/25.
 - THE DRAINAGE DESIGN IS BASED ON THE INFORMATION AVAILABLE TO THE DESIGNER AT THE TIME OF DESIGN. EXISTING DRAINAGE LOCATIONS, CONDITIONS, AND CAPACITIES ARE NOT AVAILABLE AND ARE UNVERIFIED. NO DOWNSTREAM CONNECTIONS HAVE BEEN DESIGNED. THE DRAINAGE DESIGN MUST BE UPDATED FOLLOWING SUCCESSFUL COMPLETION OF THE DRAINAGE SURVEY AND BEFORE CONSTRUCTION COMMENCES.
 - FOR DRAINAGE DETAILS, REFER TO DRAWING NO. 5223864-ATK-HDG-XX-DR-CD-000001.
 - IT IS ASSUMED THAT SUITABLE CONNECTION POINTS ARE AVAILABLE FOR THE PROPOSED DRAINAGE ASSETS.
 - PROPOSED GULLIES HAVE BEEN POSITIONED TO REPLICATE THE EXISTING DRAINAGE CONFIGURATION AS FAR AS PRACTICABLE.
 - ANY ADJUSTMENT OR REPLACEMENT OF EXISTING FRAMES AND GRATINGS SHALL BE UNDERTAKEN IN ACCORDANCE WITH S.H.W. CLAUSE 508.10.
 - ALL GULLY GRATES SHALL BE HIGHWAY D400, HEEL-SAFE, AND PEDESTRIAN-FRIENDLY GULLY GRATE WITH 425 MM X 425 MM CLEAR OPENING.

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following significant residual risks (Reference shall also be made to the design hazard log).

Construction	Live traffic & utilities, Presence of tar.
Maintenance / Cleaning	Presence of soil contamination, asbestos and breaking of concrete not known.
Use	None
Decommissioning / Demolition	None

P05	RG	PM	AC	18/09/24
Client Comments Incorporated				
P06	RG	PM	AC	20/09/24
Client Comments Incorporated				
P07	RG	PM	AC	25/02/25
RSA 2 and Stakeholder Updates				
C01	AS	PM	AC	28/11/25
Issue for Tender				
Rev	Drawn / Des	Checked	Approved	Date
Description				

Drawing Status	Suitability
APPROVED - PUBLISHED	A1

5 Wellbrook Court,
Cambridge
CB3 0NA

Tel: +44 (0) 1223276002

Copyright © AtkinsRéalis (2025)www.atkinsrealis.com

GROWING AND SHARING PROSPERITY
Delivering our City Deal


Project Title
GCP Early Works - Detailed Design

Drawing Title
GENERAL ARRANGEMENT
STAPLEFORD VILLAGE (ON ROAD)
(SCHEME 5) (SHEET 2 OF 5)

Scale	1:500	Designed / Drawn	AS	Checked	PM	Approved	AC	Authorised	AW
Original Size	A1	Date	28/11/25	Date	28/11/25	Date	28/11/25	Date	28/11/25
Drawing Number	5223864	Project	GSFR	Originator	ATK	Volume	HGN	Job No.	5223864
	DR	Type	CH		000002			Revision	C01
		Location							

THIS MAP IS REPRODUCED FROM ORNANCE SURVEY MATERIAL WITH THE PERMISSION OF ORNANCE SURVEY ON BEHALF OF THE CONTROLLER OF HIS MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. License No. 10012305

CAD FILE: C:\project\wise\atkins_transportation_uk\0396925\5223864-ATK-HGN-GSFR-DR-CH-000002.dwg

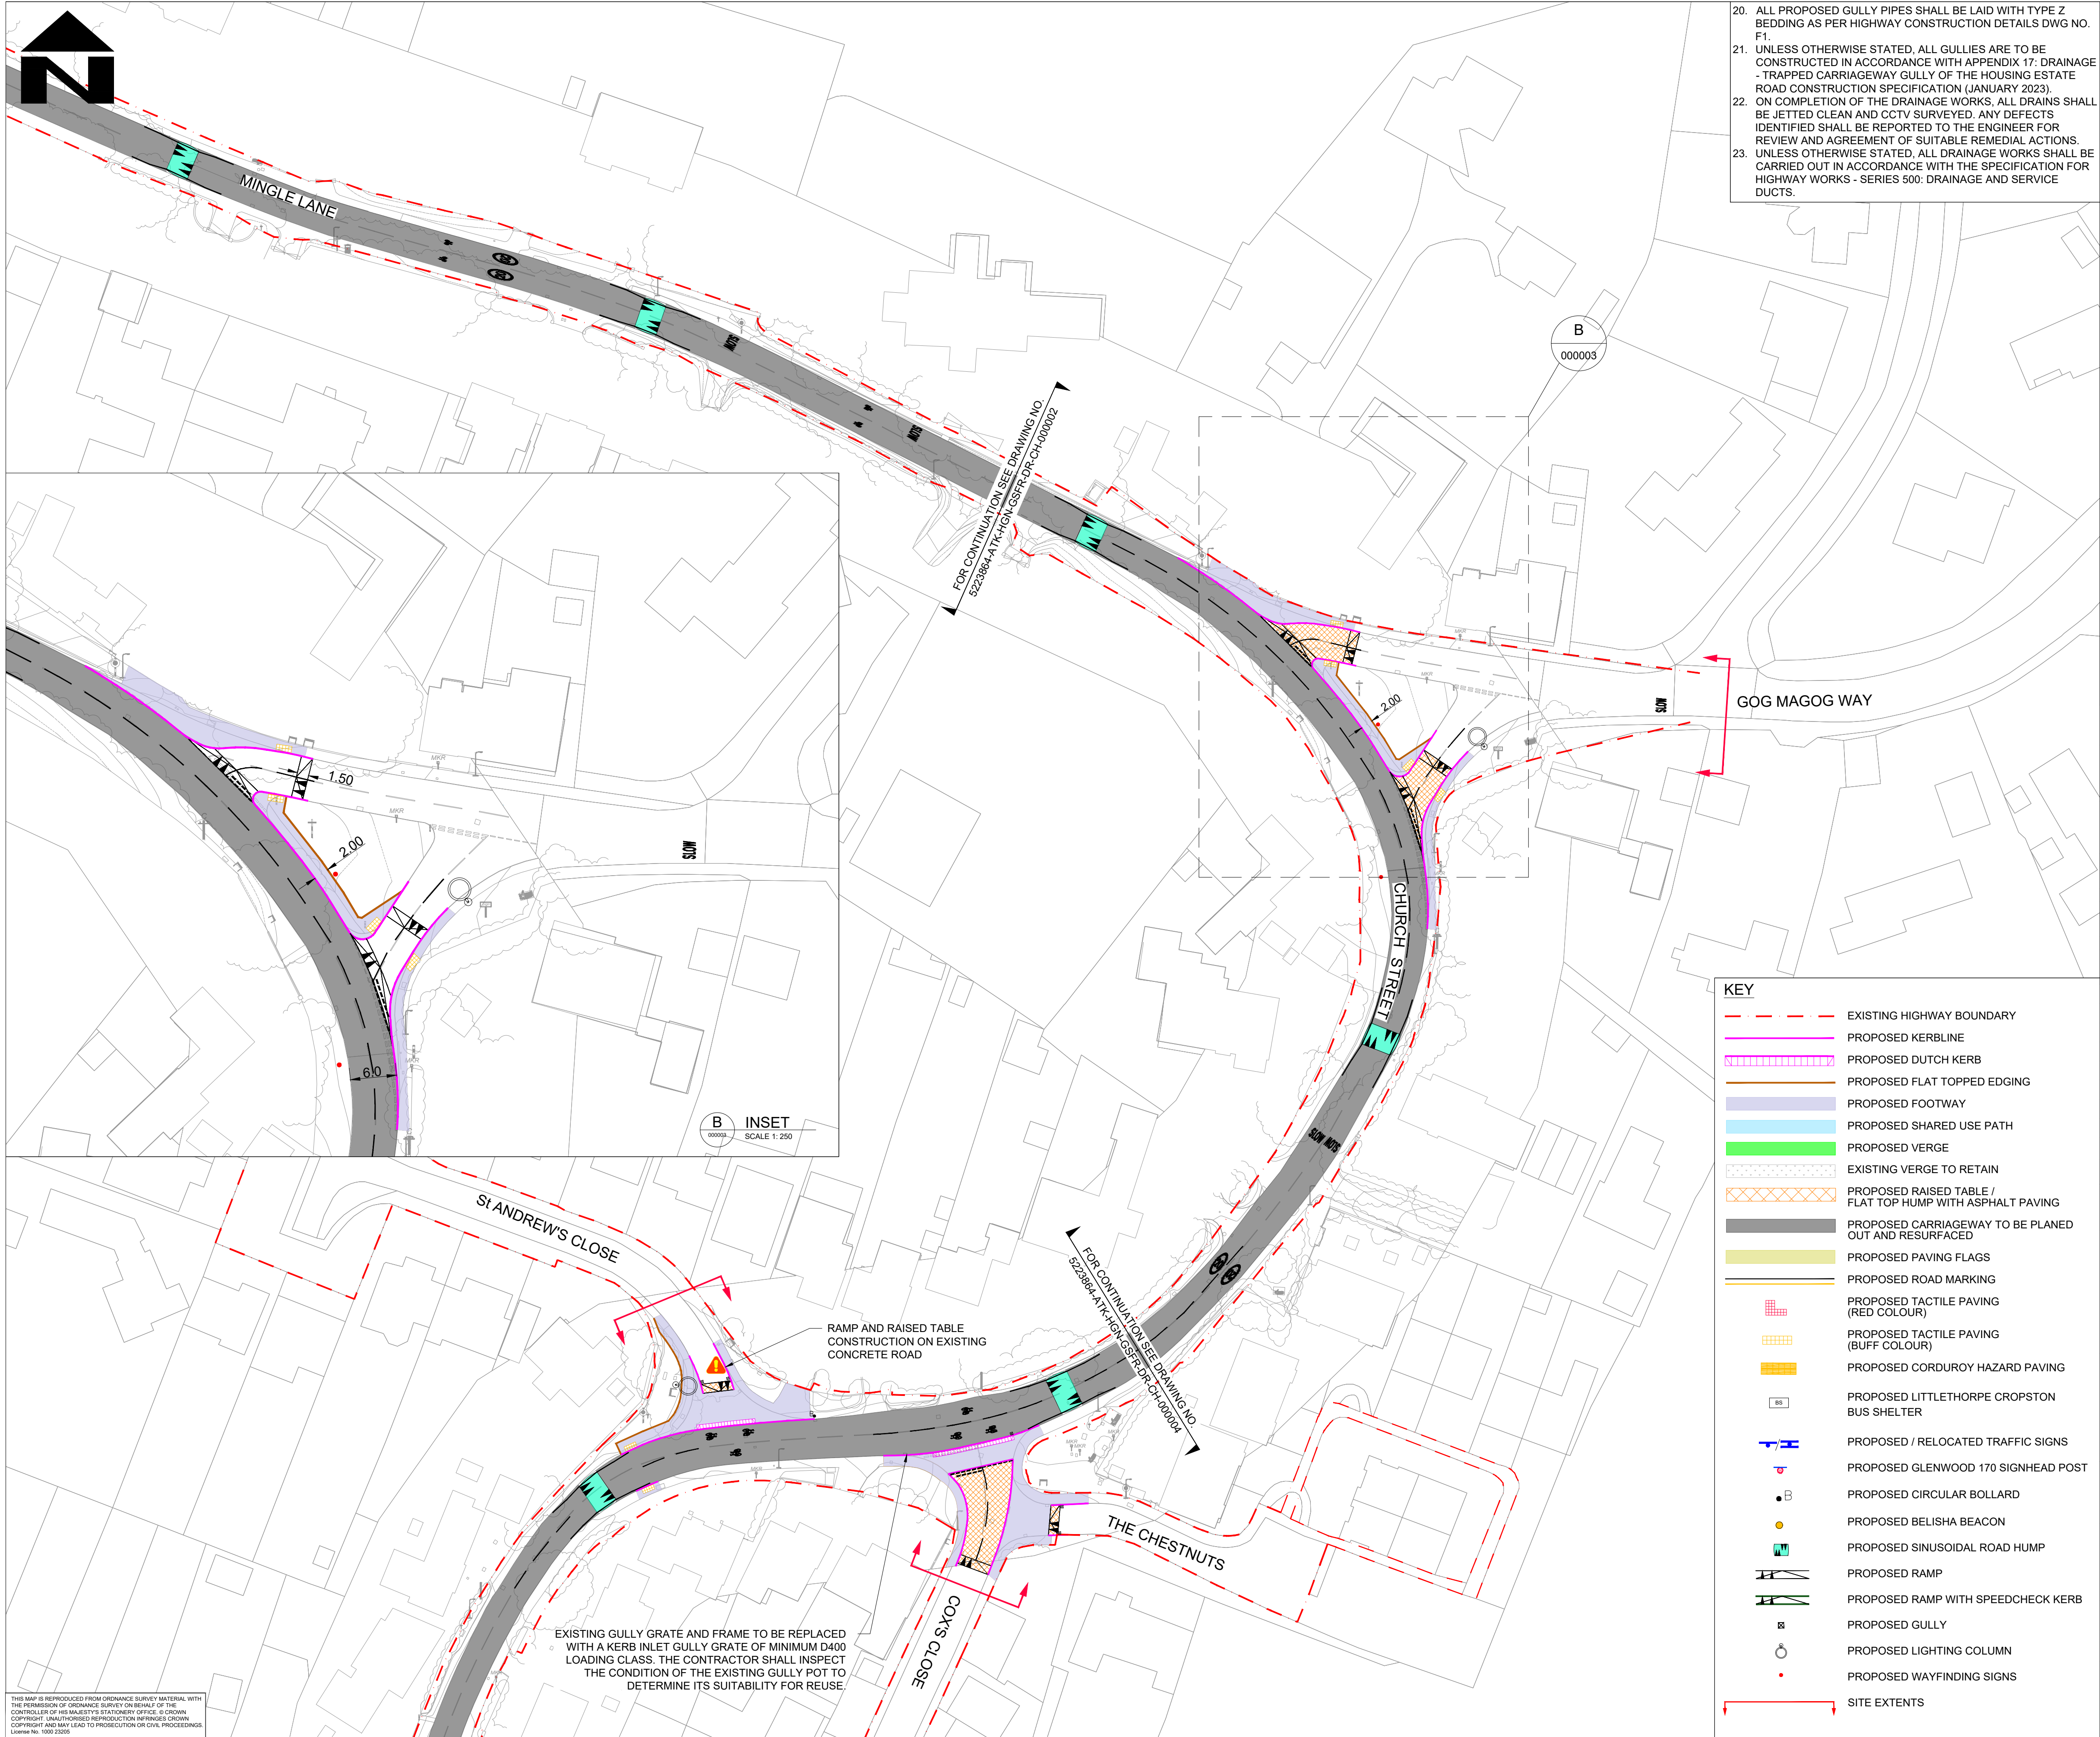

20. ALL PROPOSED GULLY PIPES SHALL BE LAID WITH TYPE Z BEDDING AS PER HIGHWAY CONSTRUCTION DETAILS DWG NO. F1.
21. UNLESS OTHERWISE STATED, ALL GULLIES ARE TO BE CONSTRUCTED IN ACCORDANCE WITH APPENDIX 17: DRAINAGE - TRAPPED CARRIAGEWAY GULLY OF THE HOUSING ESTATE ROAD CONSTRUCTION SPECIFICATION (JANUARY 2023).
22. ON COMPLETION OF THE DRAINAGE WORKS, ALL DRAINS SHALL BE JETTED CLEAN AND CCTV SURVEYED. ANY DEFECTS IDENTIFIED SHALL BE REPORTED TO THE ENGINEER FOR REVIEW AND AGREEMENT OF SUITABLE REMEDIAL ACTIONS.
23. UNLESS OTHERWISE STATED, ALL DRAINAGE WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE SPECIFICATION FOR HIGHWAY WORKS - SERIES 500: DRAINAGE AND SERVICE DUCTS.

- NOTES**
1. DO NOT SCALE FROM THIS DRAWING.
2. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE STATED.
3. LIMITS OF WORK ARE APPROXIMATE AND ARE TO BE AGREED ON SITE WITH THE OVERSEEING ORGANISATION.
4. ANY WORK OUTSIDE THE HIGHWAY BOUNDARY NEEDS PRIOR PERMISSION FROM THE LAND OWNER.
5. HEALTH AND SAFETY: THE CONTRACTOR SHALL BE AWARE OF ALL STATUTORY UNDERTAKERS PLANT THAT MAY BE LOCATED WITHIN THE SITE. PLANS SHOWING APPROXIMATE LOCATIONS HAVE BEEN SUPPLIED BY ASSET OWNER.
6. FOR SITE CLEARANCE DETAILS, REFER TO DRAWING NO 5223864-ATK-HSC-GSFR-DR-CH-000001 TO 000005.
7. FOR KERBS, FOOTWAYS AND PAVEMENT DETAILS, REFER DRAWING NO. 5223864-ATK-HPV-GSFR-DR-CH-000001 TO 000004 AND 000007.
8. FOR STANDARD DETAILS, REFER DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000002, 000003 AND 000007.
9. FOR TRAFFIC SIGNS DETAILS, REFER DRAWING NO. 5223864-ATK-HSN-GSFR-DR-CH-000001 TO 000004 AND 000006.
10. FOR ROAD MARKINGS DETAILS, REFER DRAWING NO. 5223864-ATK-HMK-GSFR-DR-CH-000001 TO 000005.
11. FOR LIGHTING DETAILS, REFER DRAWING NO. 5223864-ATK-HLG-GSFR-DR-EO-000001 TO 000004 AND 000006.
12. FOR GLENWOOD 170 SIGNHEAD POST & EATON BUS SHELTER DETAILS REFER TO DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000007.
13. THE HIGHWAY BOUNDARY SHOWN HAS BEEN UPDATED IN ACCORDANCE WITH CCC SEARCHES TEAM'S EMAIL CONFIRMATION OF REQUIRED CORRECTIONS DATED 22/08/25.
14. THE DRAINAGE DESIGN IS BASED ON THE INFORMATION AVAILABLE TO THE DESIGNER AT THE TIME OF DESIGN. EXISTING DRAINAGE LOCATIONS, CONDITIONS, AND CAPACITIES ARE NOT AVAILABLE AND ARE UNVERIFIED. NO DOWNSTREAM CONNECTIONS HAVE BEEN DESIGNED. THE DRAINAGE DESIGN MUST BE UPDATED FOLLOWING SUCCESSFUL COMPLETION OF THE DRAINAGE SURVEY AND BEFORE CONSTRUCTION COMMENCES.
15. FOR DRAINAGE DETAILS, REFER TO DRAWING NO. 5223864-ATK-HDG-XX-DR-CD-000001.
16. IT IS ASSUMED THAT SUITABLE CONNECTION POINTS ARE AVAILABLE FOR THE PROPOSED DRAINAGE ASSETS.
17. PROPOSED GULLIES HAVE BEEN POSITIONED TO REPLICATE THE EXISTING DRAINAGE CONFIGURATION AS FAR AS PRACTICABLE.
18. ANY ADJUSTMENT OR REPLACEMENT OF EXISTING FRAMES AND GRATINGS SHALL BE UNDERTAKEN IN ACCORDANCE WITH S.H.W. CLAUSE 508.10.
19. ALL GULLY GRATINGS SHALL BE HIGHWAY D400, HEEL-SAFE, AND PEDESTRIAN-FRIENDLY GULLY GRATE WITH 425 MM X 425 MM CLEAR OPENING.

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following significant residual risks (Reference shall also be made to the design hazard log).

Construction
Live traffic & utilities, Presence of tar.
Presence of soil contamination, asbestos and breaking of concrete not known.

Maintenance / Cleaning
None

Use
None

Decommissioning / Demolition
None

P05	RG	PM	AC	18/09/24
-----	----	----	----	----------

Client Comments Incorporated				
P06	RG	PM	AC	20/09/24

Client Comments Incorporated				
P07	RG	PM	AC	25/02/25

RSA 2 and Stakeholder Updates				
C01	AS	PM	AC	28/11/25

Issue for Tender				
Rev	Drawn / Des	Checked	Approved	Date

Description				
-------------	--	--	--	--

Approval Status	Suitability
APPROVED - PUBLISHED	A1

5 Wellbrook Court,
Cambridge
CB3 0NA

Tel: +44 (0) 1223276002
www.atkinsrealis.com

Copyright © AtkinsRéalis (2025)

GREATER CAMBRIDGE PARTNERSHIP
Growing and sharing prosperity
Delivering our City Deal

Project Title
GCP Early Works - Detailed Design


Drawing Title
**GENERAL ARRANGEMENT
STAPLEFORD VILLAGE (ON ROAD)
(SCHEME 5) (SHEET 3 OF 5)**

Scale	Designed / Drawn	Checked	Approved	Authorised
1:500	AS	PM	AC	AW
Original Size	Date	Date	Date	Date
A1	28/11/25	28/11/25	28/11/25	28/11/25

Drawing Number	Project	Originator	Volume	Job No.
5223864	GSFR	ATK	HGN	5223864
Location	Type	Role	Number	Revision
	DR	CH	000003	C01

THIS MAP IS REPRODUCED FROM ORDNANCE SURVEY MATERIAL WITH THE PERMISSION OF ORDNANCE SURVEY OR REPAIR OF THE CONTROLLER OF HIS MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. License No. 1000 12005

CAD FILE: C:\project\work\atkins_transportation_uk\0396925\5223864-ATK-HGN-GSFR-DR-CH-000003.dwg

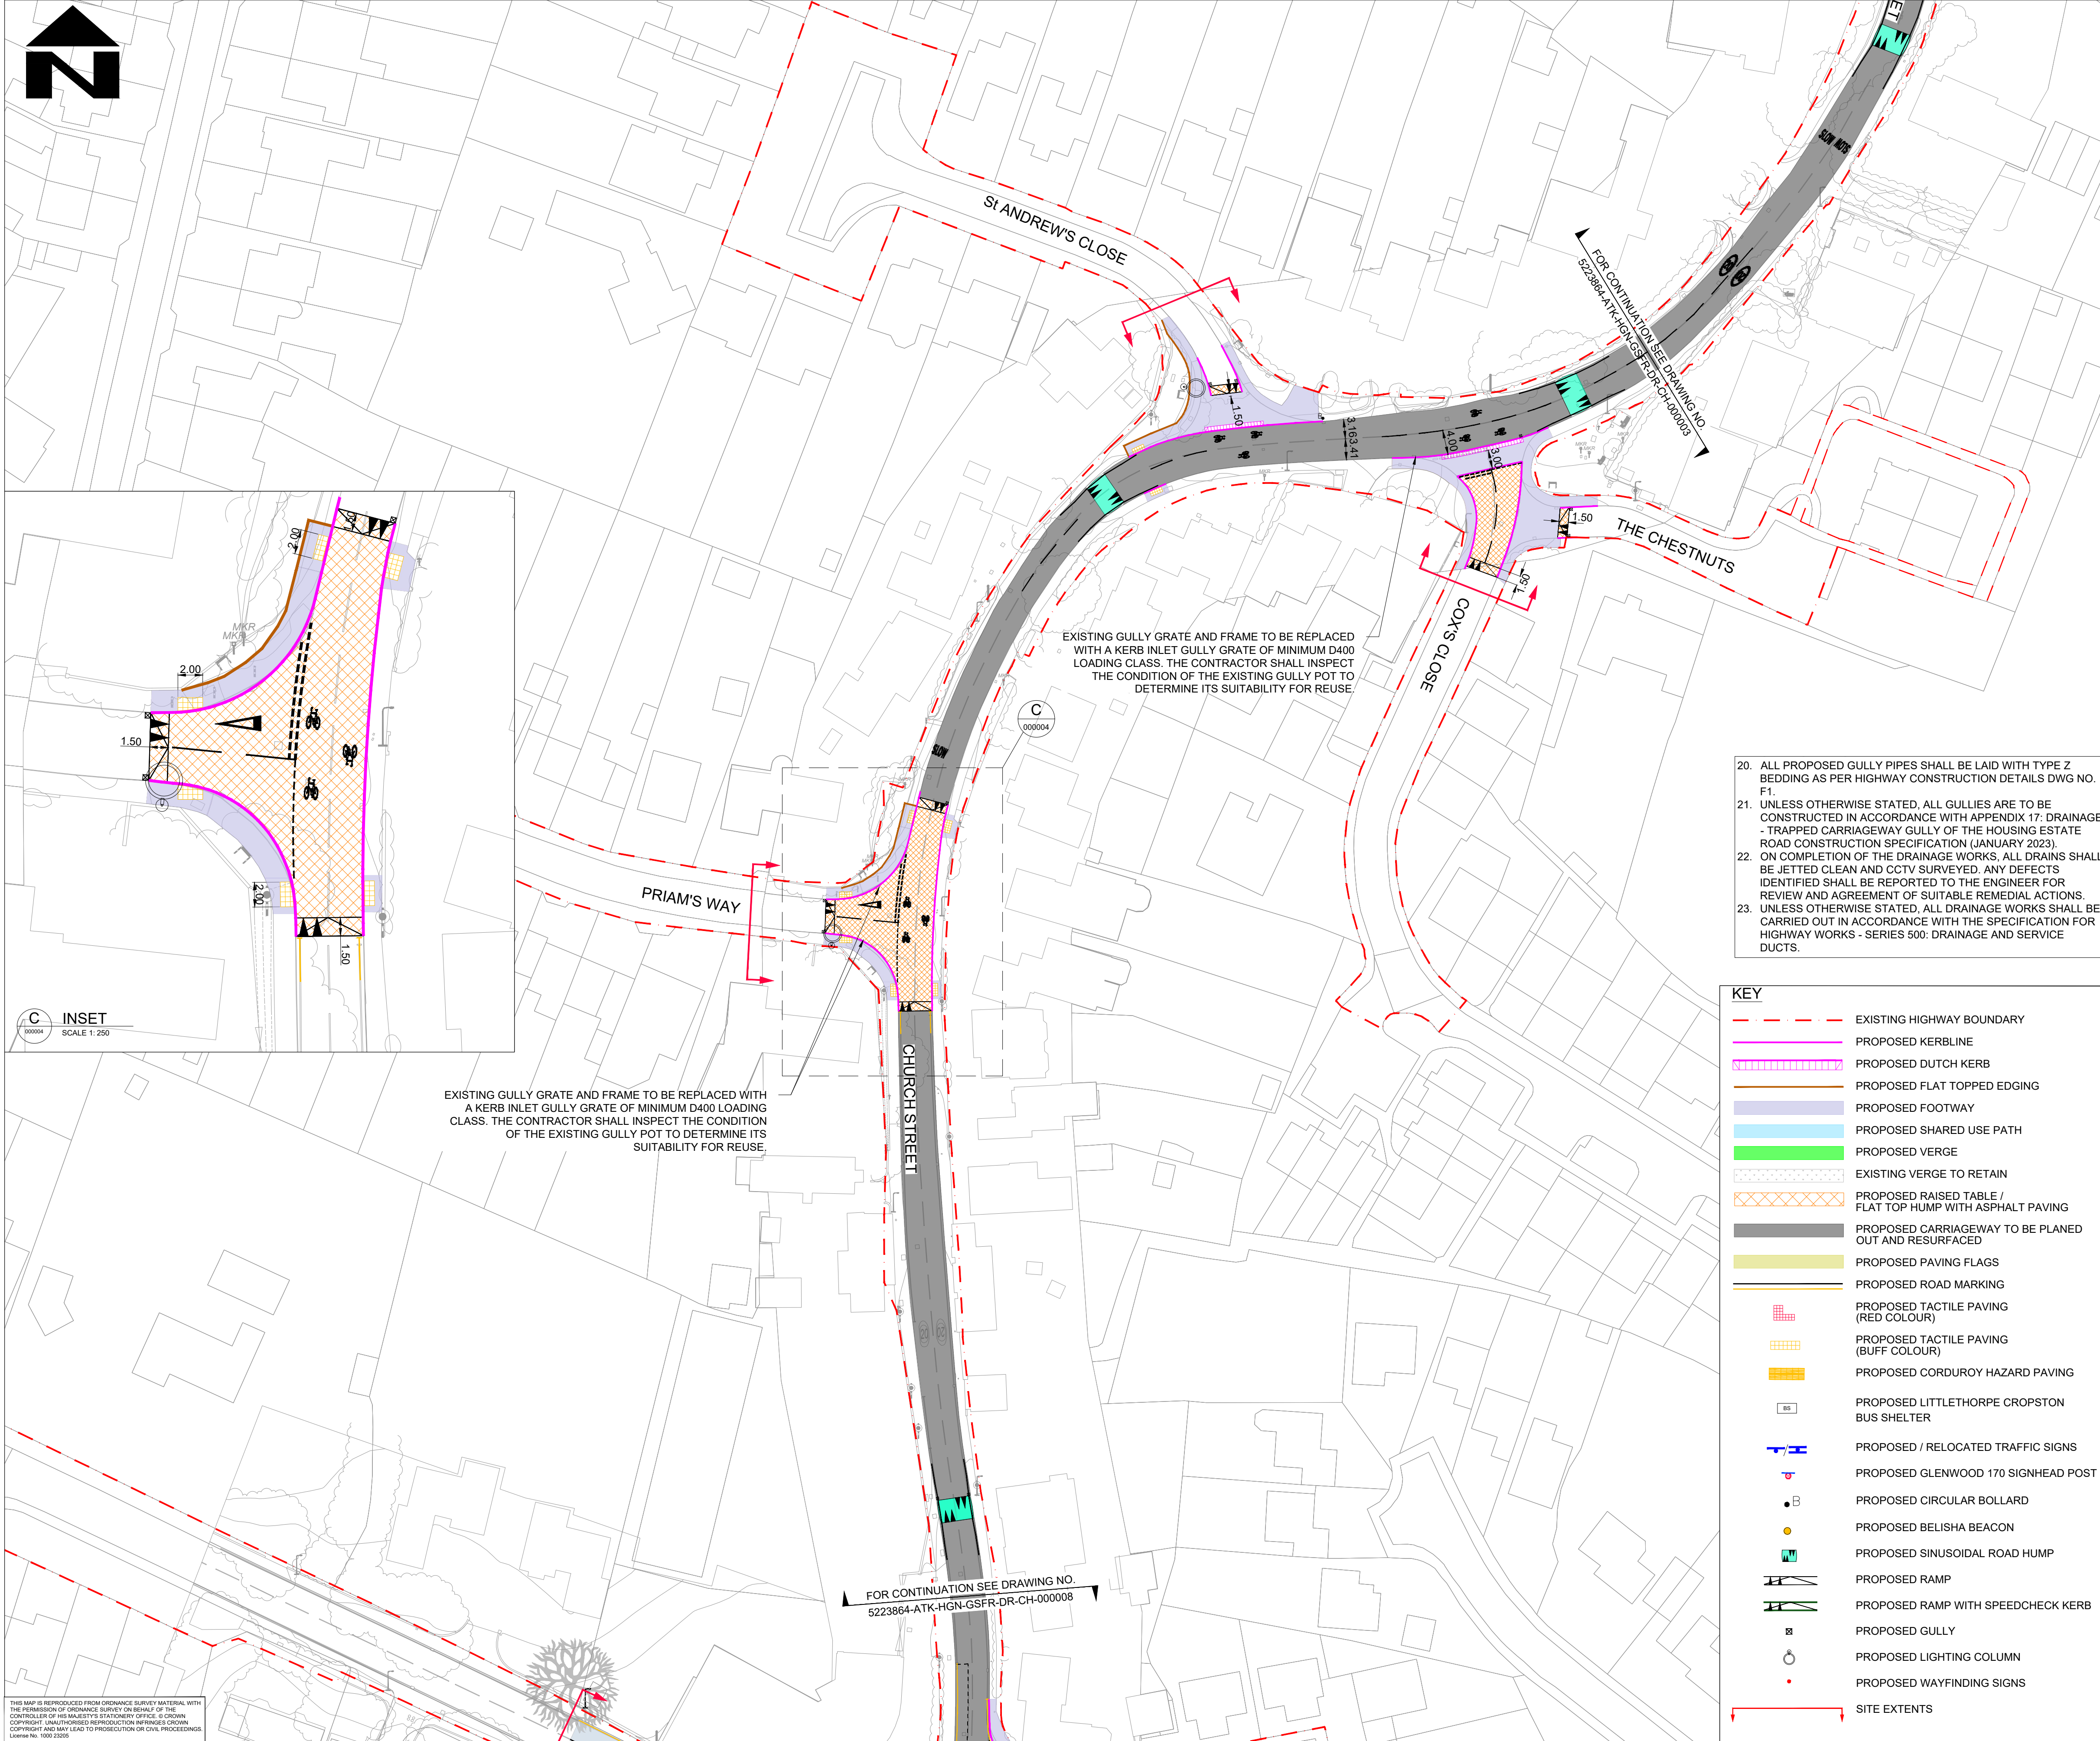

C INSET
SCALE 1:250

THIS MAP IS REPRODUCED FROM ORNANCE SURVEY MATERIAL WITH THE PERMISSION OF ORNANCE SURVEY ON BEHALF OF THE CONTROLLER OF HIS MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. License No. 10012305

CAD FILE: C:\projectwise\atkins_transportation_uk\d396925\5223864-ATK-HGN-GSFR-DR-CH-000004.dwg

- NOTES
- DO NOT SCALE FROM THIS DRAWING.
 - ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE STATED.
 - LIMITS OF WORK ARE APPROXIMATE AND ARE TO BE AGREED ON SITE WITH THE OVERSEEING ORGANISATION.
 - ANY WORK OUTSIDE THE HIGHWAY BOUNDARY NEEDS PRIOR PERMISSION FROM THE LAND OWNER.
 - HEALTH AND SAFETY:
THE CONTRACTOR SHALL BE AWARE OF ALL STATUTORY UNDERTAKERS PLANT THAT MAY BE LOCATED WITHIN THE SITE. PLANS SHOWING APPROXIMATE LOCATIONS HAVE BEEN SUPPLIED BY ASSET OWNER.
 - FOR SITE CLEARANCE DETAILS, REFER TO DRAWING NO. 5223864-ATK-HSC-GSFR-DR-CH-000001 TO 000005.
 - FOR KERBS, FOOTWAYS AND PAVEMENT DETAILS, REFER DRAWING NO. 5223864-ATK-HPV-GSFR-DR-CH-000001 TO 000004 AND 000007.
 - FOR STANDARD DETAILS, REFER DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000002, 000003 AND 000007.
 - FOR TRAFFIC SIGNS DETAILS, REFER DRAWING NO. 5223864-ATK-HSN-GSFR-DR-CH-000001 TO 000004 AND 000006.
 - FOR ROAD MARKINGS DETAILS, REFER DRAWING NO. 5223864-ATK-HMK-GSFR-DR-CH-000001 TO 000005.
 - FOR LIGHTING DETAILS, REFER DRAWING NO. 5223864-ATK-HLG-GSFR-DR-EO-000001 TO 000004 AND 000006.
 - FOR GLENWOOD 170 SIGNHEAD POST & EATON BUS SHELTER DETAILS REFER TO DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000007.
 - THE HIGHWAY BOUNDARY SHOWN HAS BEEN UPDATED IN ACCORDANCE WITH CCC SEARCHES TEAM'S EMAIL CONFIRMATION OF REQUIRED CORRECTIONS DATED 22/08/25.
 - THE DRAINAGE DESIGN IS BASED ON THE INFORMATION AVAILABLE TO THE DESIGNER AT THE TIME OF DESIGN. EXISTING DRAINAGE LOCATIONS, CONDITIONS, AND CAPACITIES ARE NOT AVAILABLE AND ARE UNVERIFIED. NO DOWNSTREAM CONNECTIONS HAVE BEEN DESIGNED. THE DRAINAGE DESIGN MUST BE UPDATED FOLLOWING SUCCESSFUL COMPLETION OF THE DRAINAGE SURVEY AND BEFORE CONSTRUCTION COMMENCES.
 - FOR DRAINAGE DETAILS, REFER TO DRAWING NO. 5223864-ATK-HDG-XX-DR-CD-000001.
 - IT IS ASSUMED THAT SUITABLE CONNECTION POINTS ARE AVAILABLE FOR THE PROPOSED DRAINAGE ASSETS.
 - PROPOSED GULLIES HAVE BEEN POSITIONED TO REPLICATE THE EXISTING DRAINAGE CONFIGURATION AS FAR AS PRACTICABLE.
 - ANY ADJUSTMENT OR REPLACEMENT OF EXISTING FRAMES AND GRATINGS SHALL BE UNDERTAKEN IN ACCORDANCE WITH S.H.W. CLAUSE 508.10.
 - ALL GULLY GRATINGS SHALL BE HIGHWAY D400, HEEL-SAFE, AND PEDESTRIAN-FRIENDLY GULLY GRATE WITH 425 MM X 425 MM CLEAR OPENING.

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following significant residual risks (Reference shall also be made to the design hazard log).

Construction
Live traffic & utilities, Presence of tar.
Presence of soil contamination, asbestos and breaking of concrete not known.

Maintenance / Cleaning
None

Use
None

Decommissioning / Demolition
None

P05	RG	PM	AC	18/09/24
-----	----	----	----	----------

Client Comments Incorporated

P06	RG	PM	AC	20/09/24
-----	----	----	----	----------

Client Comments Incorporated

P07	RG	PM	AC	25/02/25
-----	----	----	----	----------

RSA 2 and Stakeholder Updates

C01	AS	PM	AC	28/11/25
-----	----	----	----	----------

Issue for Tender

Rev	Drawn / Des	Checked	Approved	Date
-----	-------------	---------	----------	------

Description

Drawing Status	Suitability
APPROVED - PUBLISHED	A1

5 Wellbrook Court,
Cambridge
CB3 0NA

Tel: +44 (0) 1223276002

Copyright © AtkinsRéalis (2025) www.atkinsrealis.com

Client

GREATER
CAMBRIDGE
PARTNERSHIP
Growing and sharing prosperity
Delivering our City Deal


Project Title

GCP Early Works - Detailed Design

Drawing Title

GENERAL ARRANGEMENT
STAPLEFORD VILLAGE (ON ROAD)
(SCHEME 5) (SHEET 4 OF 5)

Scale	Designed / Drawn	Checked	Approved	Authorised
1:500	AS	PM	AC	AW
Original Size	Date	Date	Date	Date
A1	28/11/25	28/11/25	28/11/25	28/11/25
Drawing Number	Project	Originator	Volume	Job No.
5223864	5223864	ATK	HGN	5223864
GSFR	DR	CH	000004	Revision
Location	Type	Role	Number	C01

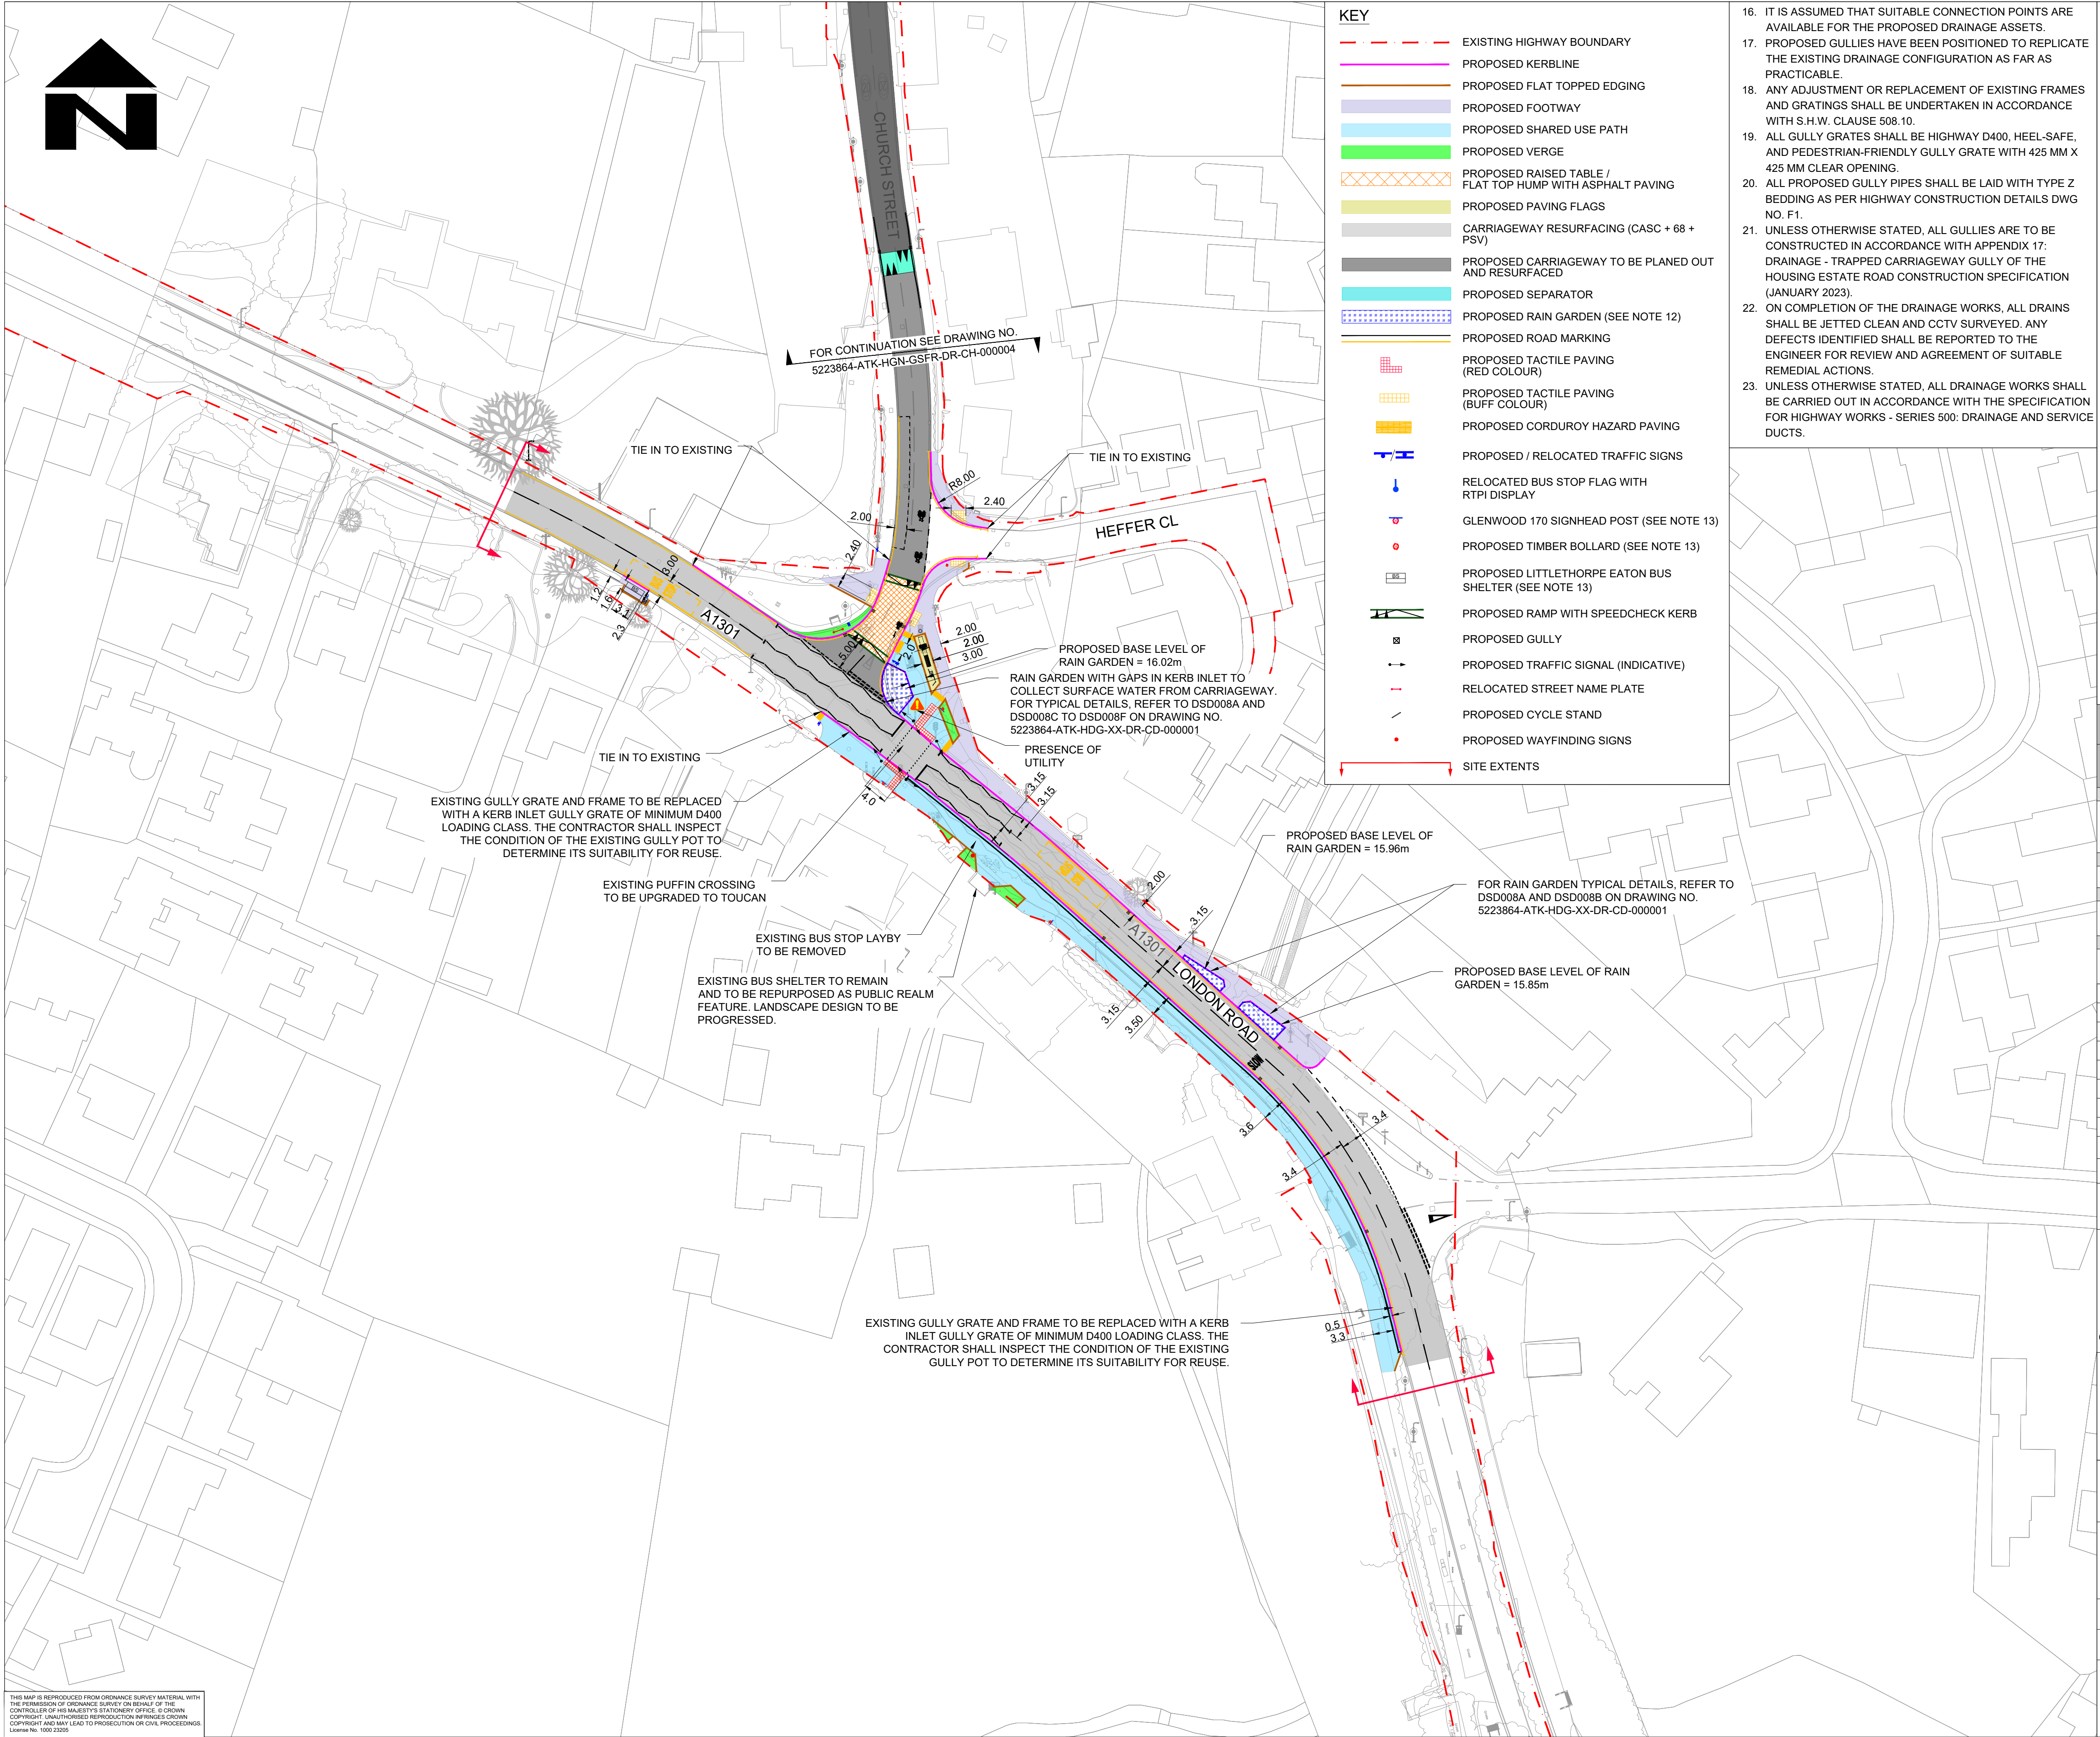

KEY

EXISTING HIGHWAY BOUNDARY

PROPOSED KERBLINE

PROPOSED FLAT TOPPED EDGING

PROPOSED FOOTWAY

PROPOSED SHARED USE PATH

PROPOSED VERGE

PROPOSED RAISED TABLE / FLAT TOP HUMP WITH ASPHALT PAVING

PROPOSED PAVING FLAGS

CARRIAGEWAY RESURFACING (CASC + 68 + PSV)

PROPOSED CARRIAGEWAY TO BE PLANED OUT AND RESURFACED

PROPOSED SEPARATOR

PROPOSED RAIN GARDEN (SEE NOTE 12)

PROPOSED ROAD MARKING

PROPOSED TACTILE PAVING (RED COLOUR)

PROPOSED TACTILE PAVING (BUFF COLOUR)

PROPOSED CORDUROY HAZARD PAVING

PROPOSED / RELOCATED TRAFFIC SIGNS

RELOCATED BUS STOP FLAG WITH RTPI DISPLAY

GLENWOOD 170 SIGNHEAD POST (SEE NOTE 13)

PROPOSED TIMBER BOLLARD (SEE NOTE 13)

PROPOSED LITTLETHORPE EATON BUS SHELTER (SEE NOTE 13)

PROPOSED RAMP WITH SPEEDCHECK KERB

PROPOSED GULLY

PROPOSED TRAFFIC SIGNAL (INDICATIVE)

RELOCATED STREET NAME PLATE

PROPOSED CYCLE STAND

PROPOSED WAYFINDING SIGNS

SITE EXTENTS

16. IT IS ASSUMED THAT SUITABLE CONNECTION POINTS ARE AVAILABLE FOR THE PROPOSED DRAINAGE ASSETS.
17. PROPOSED GULLIES HAVE BEEN POSITIONED TO REPLICATE THE EXISTING DRAINAGE CONFIGURATION AS FAR AS PRACTICABLE.
18. ANY ADJUSTMENT OR REPLACEMENT OF EXISTING FRAMES AND GRATINGS SHALL BE UNDERTAKEN IN ACCORDANCE WITH S.H.W. CLAUSE 508.10.
19. ALL GULLY GRATES SHALL BE HIGHWAY D400, HEEL-SAFE, AND PEDESTRIAN-FRIENDLY GULLY GRATE WITH 425 MM X 425 MM CLEAR OPENING.
20. ALL PROPOSED GULLY PIPES SHALL BE LAID WITH TYPE Z BEDDING AS PER HIGHWAY CONSTRUCTION DETAILS DWG NO. F1.
21. UNLESS OTHERWISE STATED, ALL GULLIES ARE TO BE CONSTRUCTED IN ACCORDANCE WITH APPENDIX 17: DRAINAGE - TRAPPED CARRIAGEWAY GULLY OF THE HOUSING ESTATE ROAD CONSTRUCTION SPECIFICATION (JANUARY 2023).
22. ON COMPLETION OF THE DRAINAGE WORKS, ALL DRAINS SHALL BE JETTED CLEAN AND CCTV SURVEYED. ANY DEFECTS IDENTIFIED SHALL BE REPORTED TO THE ENGINEER FOR REVIEW AND AGREEMENT OF SUITABLE REMEDIAL ACTIONS.
23. UNLESS OTHERWISE STATED, ALL DRAINAGE WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE SPECIFICATION FOR HIGHWAY WORKS - SERIES 500: DRAINAGE AND SERVICE DUCTS.

- NOTES
1. DO NOT SCALE FROM THIS DRAWING.
2. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE STATED.
3. LIMITS OF WORK ARE APPROXIMATE AND ARE TO BE AGREED ON SITE WITH THE OVERSEEING ORGANISATION.
4. ANY WORK OUTSIDE THE HIGHWAY BOUNDARY NEEDS PRIOR PERMISSION FROM THE LAND OWNER.
5. HEALTH AND SAFETY:
THE CONTRACTOR SHALL BE AWARE OF ALL STATUTORY UNDERTAKERS PLANT THAT MAY BE LOCATED WITHIN THE SITE. PLANS SHOWING APPROXIMATE LOCATIONS HAVE BEEN SUPPLIED BY ASSET OWNER.
6. FOR SITE CLEARANCE DETAILS, REFER TO DRAWING NO. 5223864-ATK-HSC-GSFR-DR-CH-000001 TO 000005.
7. FOR KERBS, FOOTWAYS AND PAVEMENT DETAILS, REFER TO DRAWING NO. 5223864-ATK-HPV-GSFR-DR-CH-000001 TO 000004 AND 000007.
8. FOR TRAFFIC SIGNS DETAILS, REFER TO DRAWING NO. 5223864-ATK-HSN-GSFR-DR-CH-000001 TO 000004 AND 000006.
9. FOR ROAD MARKING DETAILS, REFER TO DRAWING NO. 5223864-ATK-HMK-GSFR-DR-CH-000001 TO 000005.
10. FOR STANDARD DETAILS, REFER DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000002, 000003 AND 000007.
11. FOR LIGHTING DETAILS, REFER DRAWING NO. 5223864-ATK-HLG-GSFR-DR-EO-000001 TO 000004 AND 000006.
12. FOR RAIN GARDEN DETAIL, REFER DRAWING NO. 5223864-ATK-HDG-XX-DR-CD-000001.
13. FOR GLENWOOD 170 SIGNHEAD POST, TIMBER BOLLARD & EATON BUS SHELTER DETAILS REFER TO DRAWING NO. 5223864-ATK-HGN-XX-DR-CH-000007 AND 000012.
14. THE HIGHWAY BOUNDARY SHOWN HAS BEEN UPDATED IN ACCORDANCE WITH CCC SEARCHES TEAM'S EMAIL CONFIRMATION OF REQUIRED CORRECTIONS DATED 22/08/25. THE DRAINAGE DESIGN IS BASED ON THE INFORMATION AVAILABLE TO THE DESIGNER AT THE TIME OF DESIGN. EXISTING DRAINAGE LOCATIONS, CONDITIONS, AND CAPACITIES ARE NOT AVAILABLE AND ARE UNVERIFIED. NO DOWNSTREAM CONNECTIONS HAVE BEEN DESIGNED. THE DRAINAGE DESIGN MUST BE UPDATED FOLLOWING SUCCESSFUL COMPLETION OF THE DRAINAGE SURVEY AND BEFORE CONSTRUCTION COMMENCES.
15. FOR DRAINAGE DETAILS, REFER TO DRAWING NO. 5223864-ATK-HDG-XX-DR-CD-000001.

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following significant residual risks (Reference shall also be made to the design hazard log).

Construction
Presence of live traffic and utilities.
Presence of tar, soil contamination, asbestos and breaking of concrete not known.

Maintenance / Cleaning
None

Use
None

Decommissioning / Demolition
None

P03	MC	ANV	AC	08/10/24
-----	----	-----	----	----------

For RSA-2 (CW resurface added)
P04 RG PM AC 25/02/25

RSA 2 and Stakeholder Updates
P05 SS PM AW 11/09/25

For Technical Review				
C01	AS	PM	AC	28/11/25

Issue for Tender				
Rev	Drawn / Des	Checked	Approved	Date

Description		Suitability
APPROVED - PUBLISHED		A1

5 Wellbrook Court,
Cambridge
CB3 0NA

Tel: +44 (0) 1223276002

Copyright © AtkinsRéalis (2025) www.atkinsrealis.com

Client

GREATER CAMBRIDGE PARTNERSHIP
Growing and sharing prosperity
Delivering our City Deal

Project Title
GCP Early Works - Detailed Design

Drawing Title
GENERAL ARRANGEMENT
STAPLEFORD VILLAGE (ON ROAD)
(SCHEME 5) (SHEET 5 OF 5)

Scale	1:500	Designed / Drawn	AS	Checked	PM	Approved	AC	Authorised	AW
Original Size	A1	Date	28/11/25	Date	28/11/25	Date	28/11/25	Date	28/11/25
Drawing Number	5223864	Project	ATK HGN	Originator	CH	Volume	GSFR 000008	Job No.	5223864
Location	DR	Type	CH	Role		Number		Revision	C01

THIS MAP IS REPRODUCED FROM ORNANCE SURVEY MATERIAL WITH THE PERMISSION OF ORNANCE SURVEY ON BEHALF OF THE CONTROLLER OF HIS MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. License No. 10012305

CAD FILE: C:\projectwise\atkins_transportation_uk\02396925\5223864-ATK-HGN-GSFR-DR-CH-000008.dwg